

iGrazer Small (BCP389 S)

Brush and iGrazer are surface mounted, exterior-rated and compact sized LED wall washing and grazing luminaires that are designed for façade and outdoor architectural lighting applications. The robust mechanical and unique optical designs make them ideal for illuminating buildings facades, bridges, overpasses and any application that requires a linear lighting solutions. Available in white, monochromatic colors, RGB, RGBW and tunable white. High and low power LED versions, various spread lenses, through wiring for end-to-end connection and DMX control option available with up to 6 pixels (6IDs) to give architects and designers the freedom to explore a wide range of concepts and design with no limitations..



Key Features (BCP389 S)

- Standard: RGBW, RGB, 2700K, 3000K and 4000K
- Optional 5000K, Monochromatic Colors and Tunable White
- Standard 300, 500 and 1000mm lengths
- Up to 6IDs (6 pixels) for easy and flexible control
- Symmetrical and asymmetrical optical distributions
- Special 4in1 RGBW LEDs version for maximum uniformity
- Robust Design & IP66 rating for outdoor use
- Adjustable $\pm 95^\circ$ tilting angle
- Available in DMX control interface option

Ordering guide

ex: BCP389 S 27K 24V 30 L50 DMX


BCP389	S		24V		L	
Family	Size / Type	CCT / Color	Voltage	Beam Angle	Length	Control/Pixels ⁽²⁾⁽³⁾
BCP389 – iGrazer	S - Small	27K – 2700K 30K – 3000K 40K – 4000K 50K – 5000K BL – Blue RD – Red GN – Green AM – Amber tW – Tunable White RGB – RGB ⁽²⁾	24V – 24V DC	17 – 17° A2 – 16°x35° 30 – 30° 40 – 40°	L30 – 300mm L50 – 500mm L100 – 1000mm	– On/Off DMX – DMX 1 Pixel 2PX – DMX 2 Pixels 3PX – DMX 3 Pixels 4PX – DMX 4 Pixels 6PX – DMX 6 Pixels
		RGBWW – RGBW(3000K) RGBNW – RGBW(4000K)		A4 – 25x40° 30 – 30° 50 – 50°		

- (1) RGB, RGBW and tW are only available in DMX
 (2) For detailed Pixels of each length/option, please check the table next page

Product Data

Product Family	iGrazer Small (BCP389 S)		
Dimensions (L x W x H)	300/500/1000 mm x 38 mm x 47 mm (without bracket) 300/500/1000 mm x 38 mm x 90 mm (with bracket)		
Source	High power LED		
Lumen Maintenance	White: 50000 hrs L70 at 35°C RGB: 50000 hrs L50 at 35°C		
Housing	Extruded aluminum with die-cast aluminum end caps		
Finishing	Electrostatically applied polyester powder coating		
Color	Dark Grey (RAL7012)		
Bracket	Aluminum plate		
Adjustability	Tilting angle $\pm 95^\circ$		
Lenses	Anti-aging and anti-UV high optical efficiency PMMA lenses		
Gasket	Silicon		
Cover	Clear tempered glass		
Control Interfaces	On/Off DMX12		
Input Voltage	24V DC		
IEC Classification	Class III		
Power Cable (On/Off)	2 pole flat cable L=15cm, 2x1.5mm ² with connectors		
Power/Signal Cable (DMX)	5 pole flat cable L=15cm, 2x1.5mm ² + 3x0.3mm ² with connectors		
Connectors	IP67 male/female connectors for through power and/or signal wiring		
Lengths	300mm	500mm	1000mm
Number of LEDs	9LED (WH/Mono) 8LED (tW)	18LED (WH/Mono/tW)	36LED (WH/Mono/tW)
	6LED (RGB/RGBW)	12LED (RGB/RGBW)	24LED (RGB/RGBW)
Max Power Consumption	9W	18W	36W
Number of Pixels (IDs)	WH/Mono	1, 3	1, 2, 6
	RGB	1	1, 2
	tW	1	1, 2, 3
	RGBW	1, 2	1, 2, 4
Max Weight	0.6kg	0.85kg	1.55kg
Standard CCT/Colors	2700K, 3000K, 4000K, RGB	RGBW	
Standard Optics	16x35°, 17°, 30°, 40°	25x40°, 30°, 50°	
Standard CRI	80		
White SDCM	4		
Colors Wavelength	R: 620 to 625nm; G: 525 to 530nm; B: 470 to 475nm		
Temperature Range	-40°C to 50°C (Operating) -35°C to 50°C (Startup) -40°C to 70°C (Storage)		
Protection Rating	IP66, IK06		
Certifications	CE, CB, CQC (all in progress)		
Warranty	3 Years		

Luminaire Dimensions:

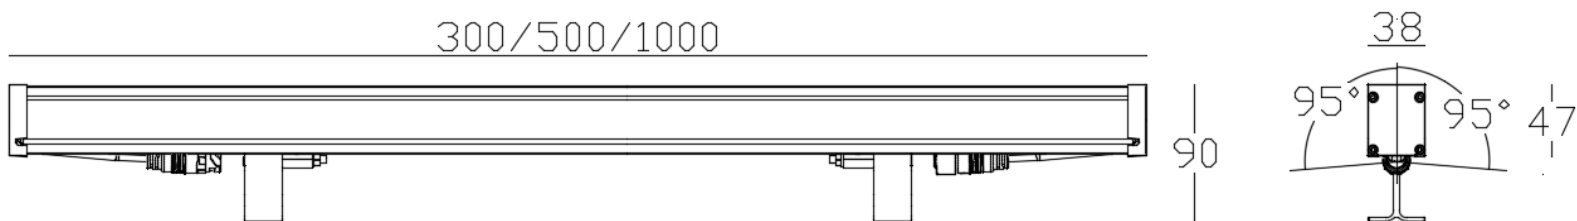


Polar Candela Distribution Curves:

17x17° Beam Angle

Features:


The 17x17° beam angle delivers an excellent light control that can reach higher than other optics
Available for all options except RGBW

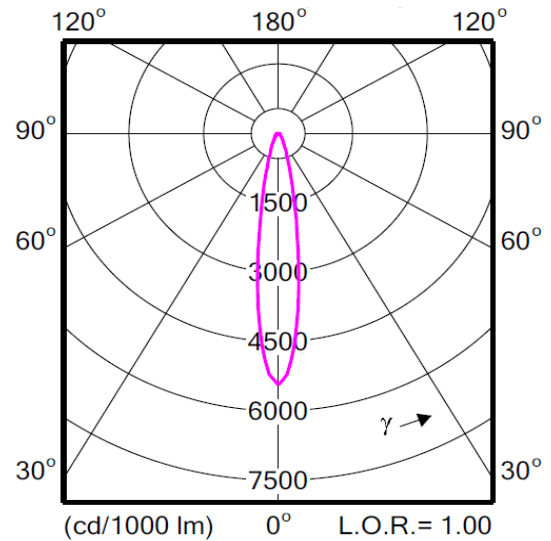

A2: 16x35° Beam Angle

Features:


The 16x35° beam angle offers significant and even light output.
Move it closer to the surface to get a higher concentrated effect.
Available for all options except RGBW

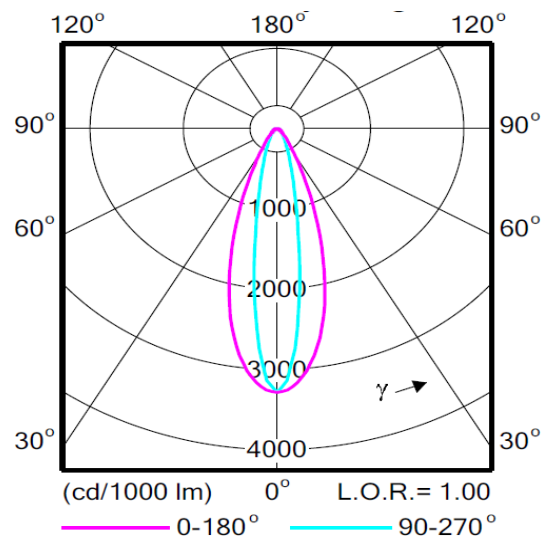

A4: 25x40° Beam Angle

Features:

The 25x40° beam angle offers significant and even light output.
Move it closer to the surface to get a more concentrated effect.
Available only for RGBW

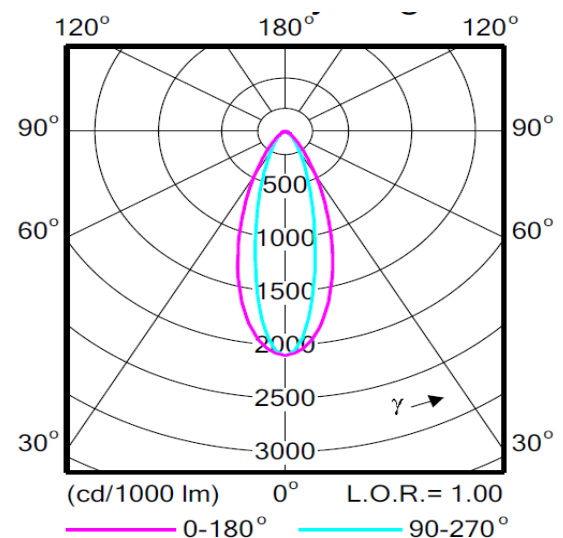

Rev. 20190328


Polar Candela Distribution Curves:

30x30° Beam Angle

Features:

The 30x30° beam angle offers a symmetrical distribution with perfect uniformity. Move it closer to the surface to get a more concentrated light.

Available for all versions

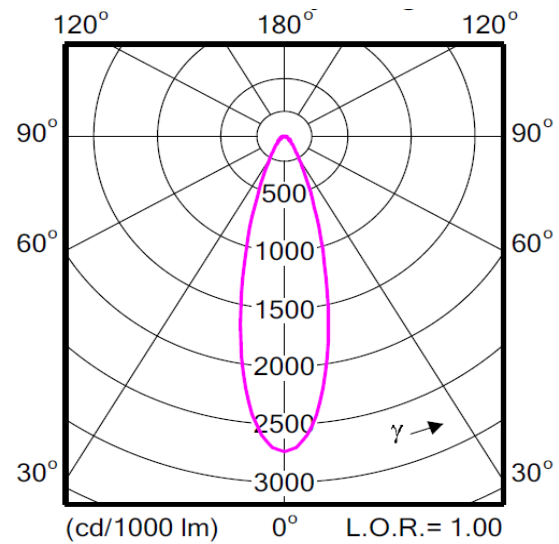


40x40° Beam Angle

Features:

The 40x40° beam angle offers a symmetrical distribution with perfect uniformity. Move it closer to the surface to get a concentrated light.

Available for all versions except RGBW

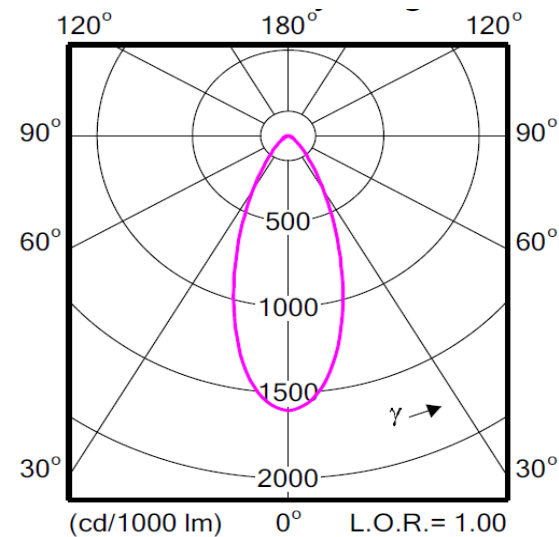


50x50° Beam Angle

Features:

The 50x50° beam angle offers a symmetrical distribution with perfect uniformity. Move it closer to the surface to get an extremely concentrated light.

Available only for RGBW

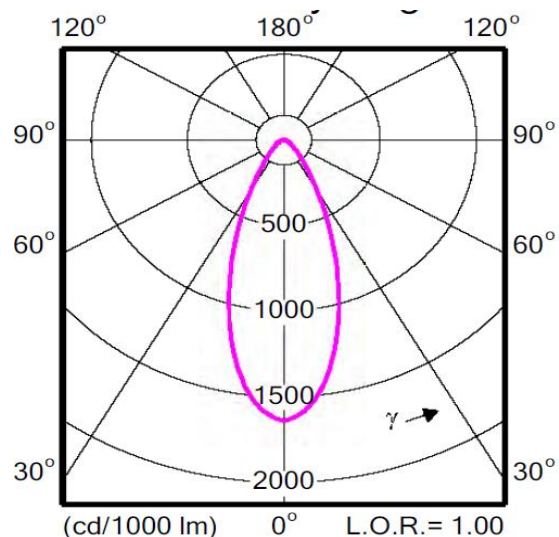

Order Information:

Description
BCP389 S RGB 24V A2 L50 DMX
BCP389 S RGB 24V 40 L50 DMX
BCP389 S RGBNW 24V A4 L50 DMX
BCP389 S RGBNW 24V 30 L50 DMX
BCP389 S 27K 24V A2 L50
BCP389 S 27K 24V A2 L50 DMX
BCP389 S 27K 24V 17 L50
BCP389 S 27K 24V 17 L50 DMX
BCP389 S 27K 24V 40 L50
BCP389 S 27K 24V 40 L50 DMX
BCP389 S 30K 24V A2 L50
BCP389 S 30K 24V A2 L50 DMX
BCP389 S 30K 24V 17 L50
BCP389 S 30K 24V 17 L50 DMX
BCP389 S 30K 24V 40 L50
BCP389 S 30K 24V 40 L50 DMX
BCP389 S 40K 24V A2 L50
BCP389 S 40K 24V A2 L50 DMX
BCP389 S 40K 24V 17 L50
BCP389 S 40K 24V 17 L50 DMX
BCP389 S 40K 24V 40 L50
BCP389 S 40K 24V 40 L50 DMX
BCP389 S RGB 24V A2 L100 DMX
BCP389 S RGB 24V 40 L100 DMX
BCP389 S RGBNW 24V A4 L100 DMX
BCP389 S RGBNW 24V 30 L100 DMX
BCP389 S 27K 24V A2 L100
BCP389 S 27K 24V A2 L100 DMX

¹Other options are available upon request

Order Information:

Description
BCP389 S 27K 24V 17 L100
BCP389 S 27K 24V 17 L100 DMX
BCP389 S 27K 24V 40 L100
BCP389 S 27K 24V 40 L100 DMX
BCP389 S 30K 24V A2 L100
BCP389 S 30K 24V A2 L100 DMX
BCP389 S 30K 24V 17 L100
BCP389 S 30K 24V 17 L100 DMX
BCP389 S 30K 24V 40 L100
BCP389 S 30K 24V 40 L100 DMX
BCP389 S 40K 24V A2 L100
BCP389 S 40K 24V A2 L100 DMX
BCP389 S 40K 24V 17 L100
BCP389 S 40K 24V 17 L100 DMX
BCP389 S 40K 24V 40 L100
BCP389 S 40K 24V 40 L100 DMX
BCP389 S RGB 24V A2 L30 DMX
BCP389 S RGB 24V 40 L30 DMX
BCP389 S RGBNW 24V A4 L30 DMX
BCP389 S RGBNW 24V 30 L30 DMX
BCP389 S 27K 24V A2 L30
BCP389 S 27K 24V A2 L30 DMX
BCP389 S 27K 24V 17 L30
BCP389 S 27K 24V 17 L30 DMX
BCP389 S 27K 24V 40 L30
BCP389 S 27K 24V 40 L30 DMX
BCP389 S 30K 24V A2 L30
BCP389 S 30K 24V A2 L30 DMX

¹Other options are available upon request

Order Information:

Description
BCP389 S 30K 24V 17 L30
BCP389 S 30K 24V 17 L30 DMX
BCP389 S 30K 24V 40 L30
BCP389 S 30K 24V 40 L30 DMX
BCP389 S 40K 24V A2 L30
BCP389 S 40K 24V A2 L30 DMX
BCP389 S 40K 24V 17 L30
BCP389 S 40K 24V 17 L30 DMX
BCP389 S 40K 24V 40 L30
BCP389 S 40K 24V 40 L30 DMX


¹Other options are available upon request

Accessories


Description
BCP389 S L30 glare shield (10 pcs)
BCP389 S L50 glare shield (10 pcs)
BCP389 S L100 glare shield (10 pcs)
ZXP390 Lead 2P DC cable 2m (10 pcs)
ZXP390 Jump 2P DC cable 2m (10 pcs)
ZXP390 Lead 5P DC/DMX cable 2m (10 pcs)
ZXP390 Jump 5P DC/DMX cable 2m (10 pcs)
ZXP390 Y-connect kit 5P DC/DMX (10 pcs)
ZXP390 Jump 5P DMX connector (10 pcs)
ZXP390 endcap male connector (20 pcs)
ZXP390 endcap female connector (20 pcs)

¹ Different cables lengths are available upon request


² End caps must be used at the end of each run

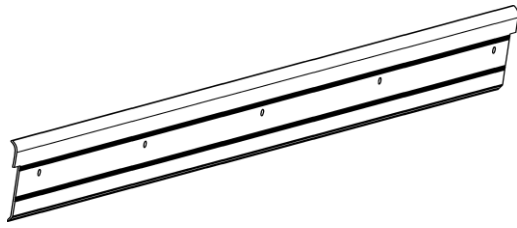


Glare Shield

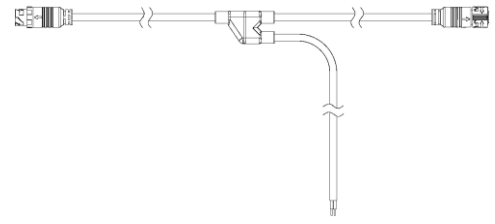


Y-connector kit 5P DC/DMX




Leader cable 2P DC 2m




Jumper cable 2P DC 2m




Leader cable 5P DC/DMX 2m



Jumper cable 5P DC/DMX 2m



End cap for male connectors



End cap for female connectors

Rated System Lumen Output ($\pm 10\%$):

BCP389 S L30

CCT/Color (All channels On)	17°	30°	40°	50°	A2	A4
	DMX	DMX	DMX	DMX	DMX	DMX
2700K	600	620	610	–	610	–
3000K	600	620	610	–	610	–
4000K	650	670	660	–	660	–
RGB	390	360	390	–	350	–
RGBNW	–	440	–	360	–	390

BCP389 S L50

CCT/Color (All channels On)	17°	30°	40°	50°	A2	A4
	DMX	DMX	DMX	DMX	DMX	DMX
2700K	1,170	1,220	1,180	–	1,200	–
3000K	1,170	1,220	1,180	–	1,200	–
4000K	1,270	1,320	1,280	–	1,290	–
RGB	730	710	760	–	680	–
RGBNW	–	670	–	540	–	580

BCP389 S L100

CCT/Color (All channels On)	17°	30°	40°	50°	A2	A4
	DMX	DMX	DMX	DMX	DMX	DMX
2700K	2,300	2,390	2,320	–	2,350	–
3000K	2,300	2,390	2,320	–	2,350	–
4000K	2,480	2,590	2,510	–	2,530	–
RGB	1,430	1,390	1,490	–	1,330	–
RGBNW	–	1,310	–	1,070	–	1,140

