

PivotSpot features a sophisticated and compact design that balances beauty and functionality.

The range is composed of cylindrical geometry with a line to separate into two sections purposefully. The front section embeds the light engine to provide illumination, while the back section connects with the heating system and the adjustable structure for versatile installations, supported by various useful accessories. In addition, two indication plates are carefully crafted on the stand and base to enhance installation process and experience. With the simplicity, Uni Spot blends into the urban areas unobtrusively.

PivotSpot is a cost-effective, architectural LED floodlight that is designed for façade, landscape and outdoor floodlighting applications. The sophisticated and compact design and high-efficiency optics make it ideal for illuminating multi-story exterior façades, bridges, landmarks and monuments. Architects and designers have the freedom to explore a wide range of concepts and designs with no limitations, thanks to a range of colors, multiple spread lenses and a DMX512/RDM control option.

Key Features (BVP379 SP2)



- Standard: RGBW30K, RGBW40K, RGB, 3000K and 4000K
- Optional 2200K, 2700K, 3500K, 5000K, 6500K, RGB65, KMonochromatic Colors, RGB30K, RGB40K, RGB65K,
- Wide Range of Beam Angles from Narrow Spot to Wide Flood
- Robust Design & IP66 rating for outdoor use
- Adjustable vertical 130° and horizontal 340° tilting angle range
- Available in DMX/RDM control interface option

Ordering guide

eg: **BVP379 SP2 1LED 30K 24V 20 DMX 20W COB**


BVP379 SP2	1LED	30K	24V	20	DMX	20W	COB
<u>Family</u>	<u># of LEDs</u>	<u>CCT / Color</u>	<u>Voltage</u>	<u>Beam Angles</u>	<u>Control Interface</u>	<u>Wattage</u>	<u>LED</u>
BVP379 SP2 – PivotSpot	1LED 3LED	22K – 2200K 27K – 2700K 30K – 3000K 35K – 3500K 40K – 4000K 50K – 5000K 65K – 6500K RGB – RGB RGB30K – RGBW(3000K) RGB40K – RGBW(4000K) RGB65K – RGBW(6500K)	24V DC	10 – 10° 15 – 15° 20 – 20° 25 – 25° 30 – 30° 35 – 35° 40 – 40° 55 – 55° 80 – 80° F4 – 10X20° F5 – 10X40° F6 – 10X60°	– On/Off DMX – DMX RDM – RDM	12W 16W 20W	– HP LED COB – COB LED

Rev. 202602

Product Data

Product Family	PivotSpot (BVP379 SP2)	
Dimensions (L x W x H)	125mm x 76mm x 148mm (with bracket)	
Source	High power LED/ COB LED	
Lumen Maintenance	50,000 hrsL70B50 at 35°C for White 50,000 hrsL50B50 at 35°C for RGB	
Housing	die-cast aluminum	
Finishing	Electrostatically applied polyester powder coating	
Color	Dark Grey (RAL7012)	
Bracket	die-cast aluminum	
Adjustability	Vertical 130° and horizontal 340° tilting angle range	
Lenses	Anti-aging and anti-UV high optical efficiency PMMA lenses	
Cover	Clear tempered glass	
Control Interfaces	On/Off, DMX12	
Input Voltage	24V DC	
IEC Classification	Class III	
Power Cable (On/Off)	2 pole round cable L=30cm, 2x1.5mm ²	
Signal Cable (DMX)	5 pole round cable L=30cm, 2x1.5mm ² +3x0.25mm ²	
Cables Connectors	IP66 Male/Female	
Max Weight	0.84kg	
Standard Number of LEDs	1 HP LED	1 COB LED
Standard Optics	10° , 15° , 30° , 55°	20° , 25° , 35°
Max Power Consumption	RGB: 12W RGB30K, RGB40K: 16W	20W
Standard CCT/Colors	RGB, RGB30K, RGB40K	3000K, 4000K
Standard CRI	80	
White SDCM	4	
Colors Wavelength	R: 620 to 625nm; G: 525 to 530nm; B: 470 to 475nm	
Temperature Range	-40°C to 50°C (Operating) -35°C to 50°C (Startup) -40°C to 70°C (Storage)	
Protection Rating	IP66, IK06	
Certifications	CE, CB, CQC(in progressing)	
Warranty	3 Years	

Luminaire Dimensions:

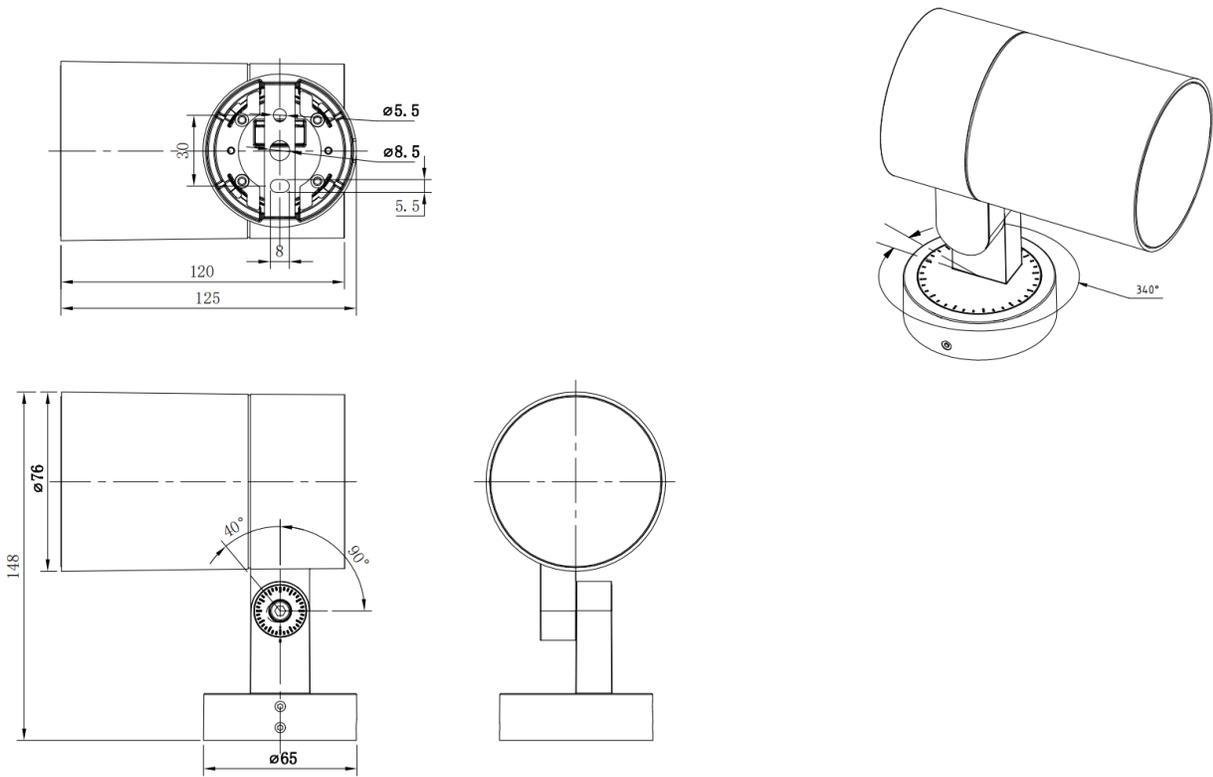


Polar Candela Distribution Curves:

COB 20° Beam Angle

Features:


The 20° beam angle offers a medium beam distribution that can be used to highlight a small to medium area in a building or making an ornament stands out.

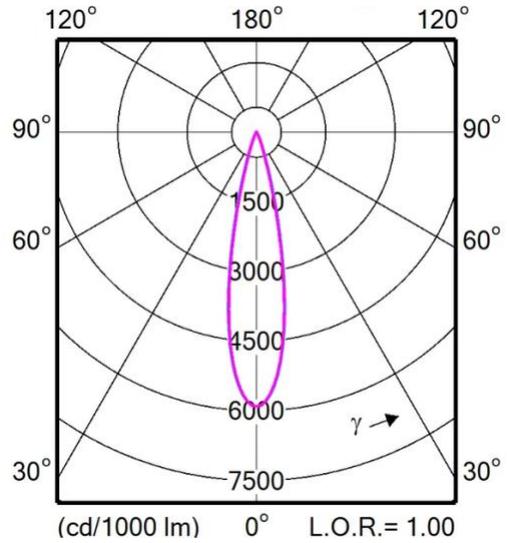

COB 25° Beam Angle

Features:


The 25° beam angle offers a medium beam distribution that can be used to highlight a small to medium area in a building or making an ornament stands out.

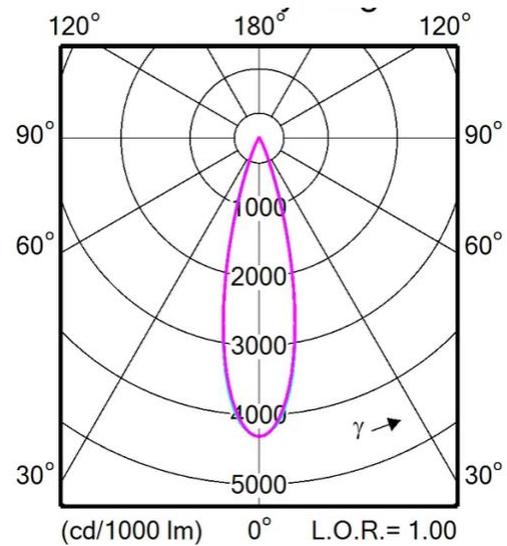

COB 35° Beam Angle

Features:

The 35° beam angle offers a medium beam distribution that can be used to highlight a small to medium area in a building or making an ornament stands out.

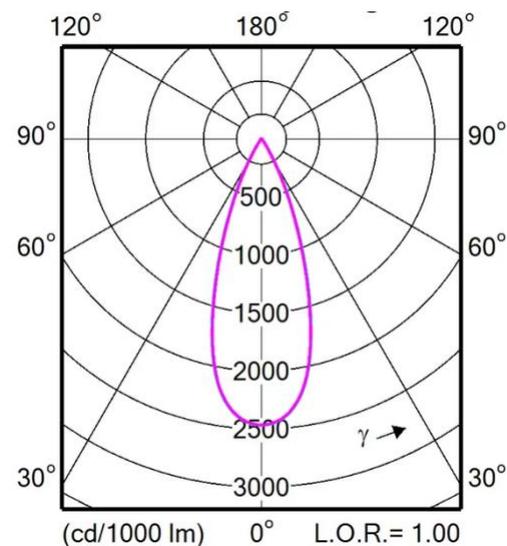


Polar Candela Distribution Curves:

HP 10° Beam Angle

Features:


The 10° beam angle offers a narrow beam that can be used to highlight a small area in a building or making an ornament stands out.

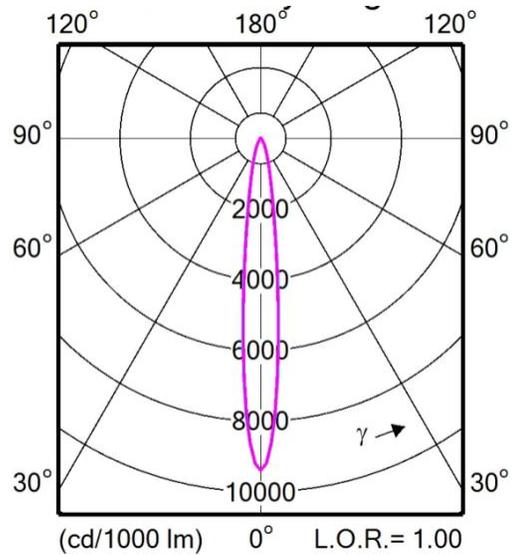

HP 15° Beam Angle

Features:


The 15° beam angle offers a medium beam distribution that can be used to highlight a small to medium area in a building or making an ornament stands out.

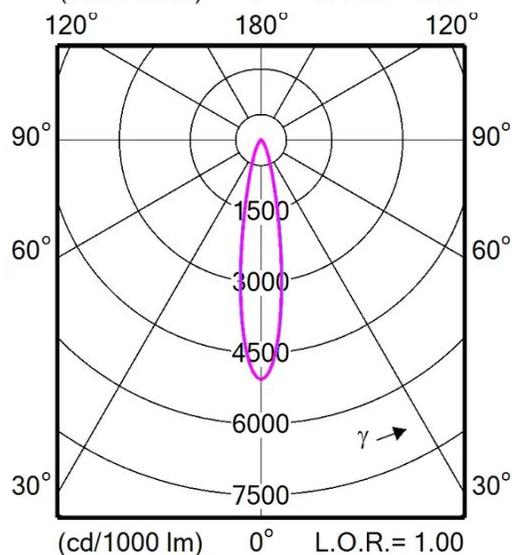

HP 30° Beam Angle

Features:

The 30° beam angle offers a medium beam distribution that can be used to highlight a small to medium area in a building or making an ornament stands out.

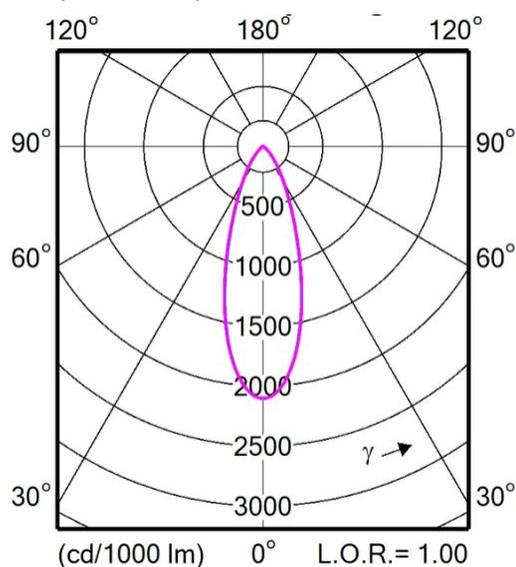


Polar Candela Distribution Curves:

HP 55° Beam Angle

Features:

The 55° beam angle offers a wide flood distribution that can be used to highlight larger and wider areas in a building or for general façade lighting.

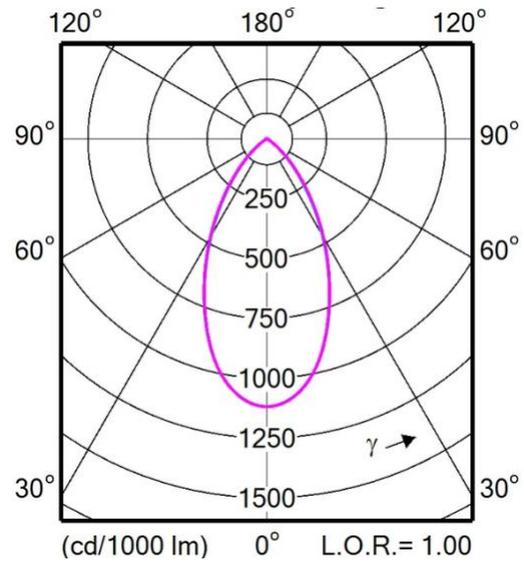

Order Information:

Description
BVP379 SP2 1LED 30K 24V 20 20W COB
BVP379 SP2 1LED 40K 24V 20 20W COB
BVP379 SP2 1LED 30K 24V 25 20W COB
BVP379 SP2 1LED 40K 24V 25 20W COB
BVP379 SP2 1LED 30K 24V 35 20W COB
BVP379 SP2 1LED 40K 24V 35 20W COB
BVP379 SP2 1LED 30K 24V 20 DMX 20W COB
BVP379 SP2 1LED 40K 24V 20 DMX 20W COB
BVP379 SP2 1LED 30K 24V 25 DMX 20W COB
BVP379 SP2 1LED 40K 24V 25 DMX 20W COB
BVP379 SP2 1LED 30K 24V 35 DMX 20W COB
BVP379 SP2 1LED 40K 24V 35 DMX 20W COB
BVP379 SP2 1LED RGB30K 24V 10 DMX 16W
BVP379 SP2 1LED RGB40K 24V 10 DMX 16W
BVP379 SP2 1LED RGB 24V 10 DMX 12W
BVP379 SP2 1LED RGB30K 24V 15 DMX 16W
BVP379 SP2 1LED RGB40K 24V 15 DMX 16W
BVP379 SP2 1LED RGB 24V 15 DMX 12W
BVP379 SP2 1LED RGB30K 24V 30 DMX 16W
BVP379 SP2 1LED RGB40K 24V 30 DMX 16W
BVP379 SP2 1LED RGB 24V 30 DMX 12W
BVP379 SP2 1LED RGB30K 24V 55 DMX 16W
BVP379 SP2 1LED RGB40K 24V 55 DMX 16W
BVP379 SP2 1LED RGB 24V 55 DMX 12W

¹Other options are available upon request


Rev. 202602

Accessories:


Description
ZXP390 Lead 2P DC cable 2m (10 pcs)
ZXP390 Jump 2P DC cable 2m (10 pcs)
ZXP390 Lead 5P DC/DMX cable 2m (10 pcs)
ZXP390 Jump 5P DC/DMX cable 2m (10 pcs)
ZXP390 Y-connect kit 5P DC/DMX (10 pcs)
ZXP390 Jump 5P DMX connector (10 pcs)
ZXP390 endcap male connector (20 pcs)
ZXP390 endcap female connector (20 pcs)

¹ Different cables lengths are available upon request


² End caps must be used at the end of each run

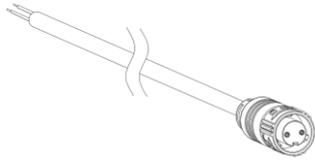


Leader cable 2P DC 2m

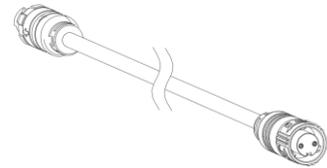


Jumper cable 2P DC 2m

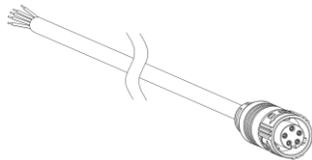


Leader cable 5P DC/DMX 2m

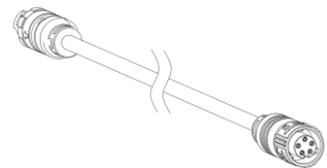


Jumper cable 5P DC/DMX 2m

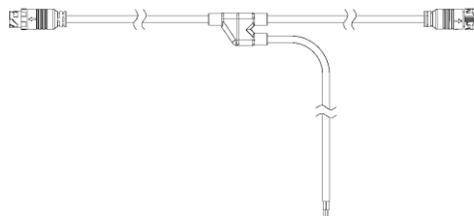

Y-connector kit 5P DC/DMX

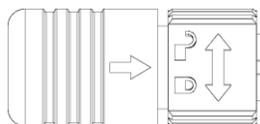

Endcap for male connectors

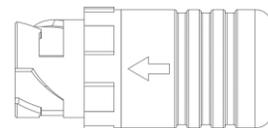

Endcap for female connectors

Rated System Lumen Output ($\pm 10\%$):

CCT/Color (All channels On)	10°	15°	20°	25°	30°	35°	55°
	DMX	DMX	DMX	DMX	DMX	DMX	DMX
3000K			1730	1675		1695	
4000K			1730	1675		1695	
RGB	310	295			275		245
RGB30K	540	510			480		425
RGB40K	570	535			505		445

