

PivotSpot features a sophisticated and compact design that balances beauty and functionality.

The range is composed of cylindrical geometry with a line to separate into two sections purposefully. The front section embeds the light engine to provide illumination, while the back section connects with the heating system and the adjustable structure for versatile installations, supported by various useful accessories. In addition, two indication plates are carefully crafted on the stand and base to enhance installation process and experience. With the simplicity, PivotSpot blends into the urban areas unobtrusively.

PivotSpot is a cost-effective, architectural LED floodlight that is designed for façade, landscape and outdoor floodlighting applications. The sophisticated and compact design and high-efficiency optics make it ideal for illuminating multi-story exterior façades, bridges, landmarks and monuments. Architects and designers have the freedom to explore a wide range of concepts and designs with no limitations, thanks to a range of colors, multiple spread lenses and a DMX512/RDM control option.



Key Features (BVP379 SP4)

- Standard: RGBW30K, RGBW40K, RGB, 3000K and 4000K
- Optional 2200K, 2700K, 3500K, 5000K, 5700K, 6500K, RGB65K
- Wide Range of Beam Angles from Narrow Spot to Wide Flood
- Robust Design & IP66 rating for outdoor use
- Adjustable vertical 130° and horizontal 340° tilting angle range
- Available in DMX/RDM control interface option

Ordering guide


eg: BVP379 SP4 4LED 30K 220V 20 RDM 50W COB

BVP379		SP4		4LED		30K		220V		20		RDM		50W		COB															
Family	# of LEDs	CCT / Color		Voltage		Beam Angles		Control Interface		Wattage		LED																			
BVP379 SP4 – PivotSpot	4LED 8LED	22K – 2200K	27K – 2700K	30K – 3000K	35K – 3500K	40K – 4000K	50K – 5000K	65K – 6500K	RGB30K – RGBW(3000K)	RGB40K – RGBW(4000K)	RGB65K – RGBW(6500K)	10 – 10°	15 – 15°	20 – 20°	25 – 25°	30 – 30°	35 – 35°	40 – 40°	45 – 45°	55 – 55°	80 – 80°	F4 – 10X20°	F5 – 10X40°	F6 – 10X60°	– On/Off	DMX – DMX	RDM – RDM	DALI – DALI	50W	– HP LED	COB – COB LED

Product Data

Product Family	PivotSpot (BVP379 SP4)	
Dimensions (L x W x H)	207mm x 125mm x 238mm (with bracket)	
Source	High power LED/ COB LED	
Lumen Maintenance	50,000 hrsL70B50 at 35°C for White 50,000 hrsL50B50 at 35°C for RGB	
Housing	die-cast aluminum	
Finishing	Electrostatically applied polyester powder coating	
Color	Dark Grey (RAL7012)	
Bracket	die-cast aluminum	
Adjustability	Vertical 130° and horizontal 340° tilting angle range	
Lenses	Anti-aging and anti-UV high optical efficiency PMMA lenses	
Cover	Clear tempered glass	
Control Interfaces	On/Off, DMX/RDM/DALI	
Input Voltage	220V AC	
IEC Classification	Class I	
Power Cable (On/Off)	3 pole round cable L=50cm, 3x1.0mm ² with flying wires	
Signal Cable (DMX)	4 pole round cable L=50cm, 4x0.5mm ² (DMX /RDMversions only)	
Cables Connectors	IP66 Male/Female	
Max Weight	2.84kg	
Standard Number of LEDs	4 HP LED	4 COB LED
Standard Optics	10° , 15° , 30° , 55°	20° , 25° , 35°
Max Power Consumption	50W	
Standard CCT/Colors	RGB, RGB30K, RGB40K	3000K, 4000K
Standard CRI	80	
White SDCM	4	
Colors Wavelength	R: 620 to 625nm; G: 525 to 530nm; B: 470 to 475nm	
Temperature Range	-40°C to 50°C (Operating) -35°C to 50°C (Startup) -40°C to 70°C (Storage)	
Protection Rating	IP66, IK08	
Certifications	CE, CB, CQC(in progressing)	
Warranty	3 Years	

Luminaire Dimensions:

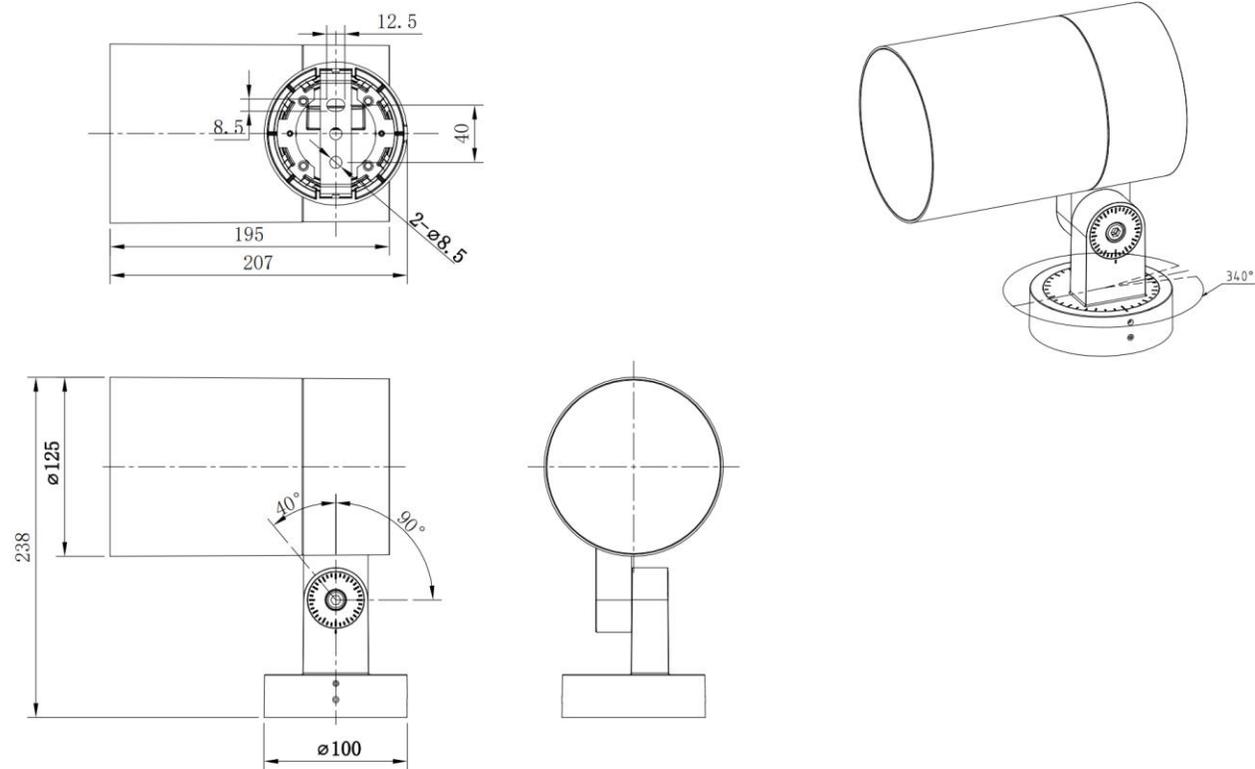


Polar Candela Distribution Curves:

COB 20° Beam Angle

Features:


The 20° beam angle offers a medium beam distribution that can be used to highlight a small to medium area in a building or making an ornament stands out.

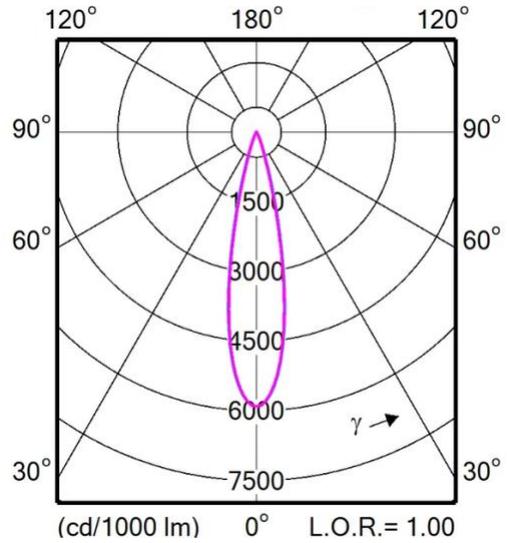

COB 25° Beam Angle

Features:


The 25° beam angle offers a medium beam distribution that can be used to highlight a small to medium area in a building or making an ornament stands out.

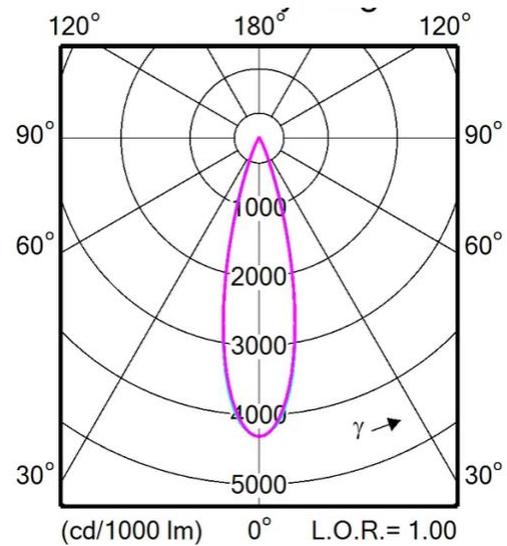

COB 35° Beam Angle

Features:

The 35° beam angle offers a medium beam distribution that can be used to highlight a small to medium area in a building or making an ornament stands out.

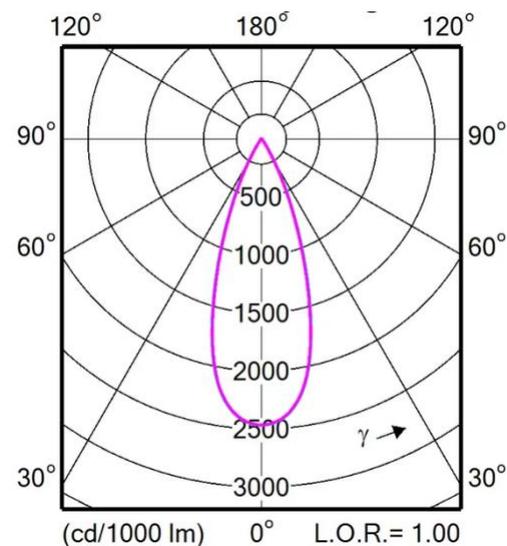


Polar Candela Distribution Curves:

HP 10° Beam Angle

Features:


The 10° beam angle offers a narrow beam that can be used to highlight a small area in a building or making an ornament stands out.

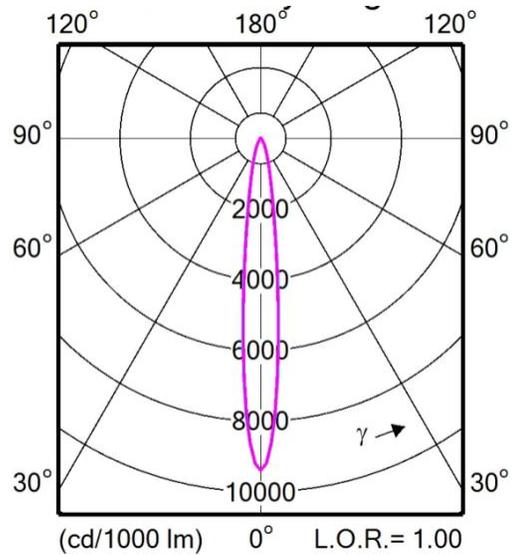

HP 15° Beam Angle

Features:


The 15° beam angle offers a medium beam distribution that can be used to highlight a small to medium area in a building or making an ornament stands out.

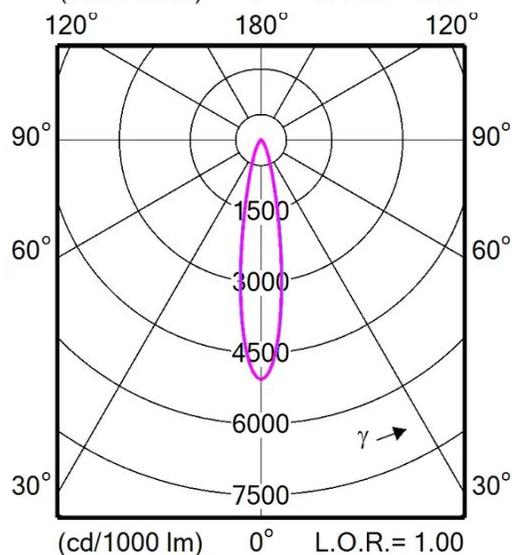

HP 30° Beam Angle

Features:

The 30° beam angle offers a medium beam distribution that can be used to highlight a small to medium area in a building or making an ornament stands out.

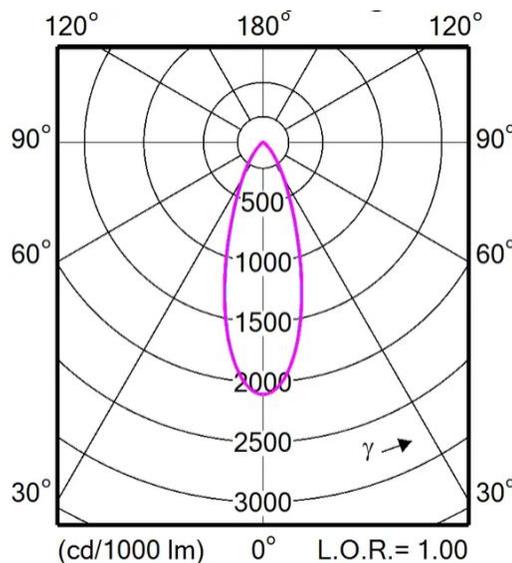


Polar Candela Distribution Curves:

HP 55° Beam Angle

Features:

The 55° beam angle offers a wide flood distribution that can be used to highlight larger and wider areas in a building or for general façade lighting.

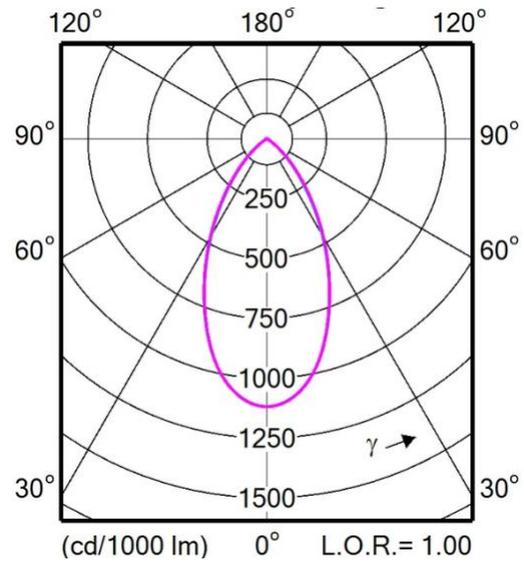

Order Information:

Description
BVP379 SP4 4LED 30K 220V 20 50W COB
BVP379 SP4 4LED 40K 220V 20 50W COB
BVP379 SP4 4LED 30K 220V 25 50W COB
BVP379 SP4 4LED 40K 220V 25 50W COB
BVP379 SP4 4LED 30K 220V 35 50W COB
BVP379 SP4 4LED 40K 220V 35 50W COB
BVP379 SP4 4LED 30K 220V 20 RDM 50W COB
BVP379 SP4 4LED 40K 220V 20 RDM 50W COB
BVP379 SP4 4LED 30K 220V 25 RDM 50W COB
BVP379 SP4 4LED 40K 220V 25 RDM 50W COB
BVP379 SP4 4LED 30K 220V 35 RDM 50W COB
BVP379 SP4 4LED 40K 220V 35 RDM 50W COB
BVP379 SP4 4LED RGB30K 220V 10 RDM 50W
BVP379 SP4 4LED RGB40K 220V 10 RDM 50W
BVP379 SP4 4LED RGB 220V 10 RDM 50W
BVP379 SP4 4LED RGB30K 220V 15 RDM 50W
BVP379 SP4 4LED RGB40K 220V 15 RDM 50W
BVP379 SP4 4LED RGB 220V 15 RDM 50W
BVP379 SP4 4LED RGB30K 220V 30 RDM 50W
BVP379 SP4 4LED RGB40K 220V 30 RDM 50W
BVP379 SP4 4LED RGB 220V 30 RDM 50W
BVP379 SP4 4LED RGB30K 220V 55 RDM 50W
BVP379 SP4 4LED RGB40K 220V 55 RDM 50W
BVP379 SP4 4LED RGB 220V 55 RDM 50W

¹Other options are available upon request


Rev. 202602

Accessories:


Description
ZXP390 Lead 2P DC cable 2m (10 pcs)
ZXP390 Jump 2P DC cable 2m (10 pcs)
ZXP390 Lead 5P DC/DMX cable 2m (10 pcs)
ZXP390 Jump 5P DC/DMX cable 2m (10 pcs)
ZXP390 Y-connect kit 5P DC/DMX (10 pcs)
ZXP390 Jump 5P DMX connector (10 pcs)
ZXP390 endcap male connector (20 pcs)
ZXP390 endcap female connector (20 pcs)

¹ Different cables lengths are available upon request


² End caps must be used at the end of each run

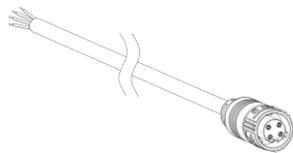


Leader cable 4P DMX 2m

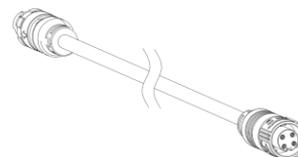

Jumper cable 4P DMX 2m

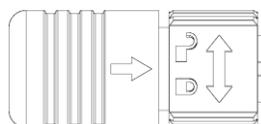

Endcap for male connectors

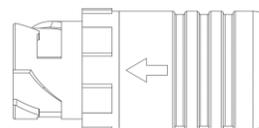

Endcap for female connectors

Rated System Lumen Output ($\pm 10\%$):

CCT/Color (All channels On)	10°	15°	20°	25°	30°	35°	55°
	DMX						
3000K			3805	3780		3885	
4000K			3925	3900		4005	
RGB	1155	1090			1025		910
RGB30K	1550	1520			1335		1140
RGB40K	1630	1600			1405		1200

